

## Measuring exhaust gas from alcohol-containing fuel-driven engine

**Publication number:** DE19607506

**Publication date:** 1997-09-04

**Inventor:** WENDT KLAUS DR RER NAT (DE)

**Applicant:** SIEMENS AG (DE)

**Classification:**

**- international:** B01D53/30; B01D53/77; G01M15/10; G01N33/00;  
G01N33/28; B01D53/30; B01D53/77; G01M15/04;  
G01N33/00; G01N33/26; (IPC1-7): B01D53/77;  
G01M15/00; G01N1/28; G01N33/00

**- European:** B01D53/30; B01D53/77; G01M15/10E; G01N33/00D2A2


**Application number:** DE19961007506 19960229

**Priority number(s):** DE19961007506 19960229

Report a data error here

### Abstract of DE19607506

The exhaust gas measurement process, for IC engines driven with alcohol-containing fuel, involves withdrawing exhaust gas by means of a sampling system and passing it through a gas scrubber (6) for soluble hydrocarbons, to an analysis system. Also claimed is the apparatus for performing the above process, comprising a gas scrubber (6) for soluble hydrocarbons provided in the exhaust gas path to the analysis system. Preferably, the scrubber is a counter-current scrubber (6), in which the exhaust gas (14) flows through a counter-current flow of scrubbing liquid (15), the scrubbing liquid flowing in a circuit (18) including a regenerator (19) for removing dissolved alcohol. Alternatively, the scrubber may consist of a liquid jet pump, into which the exhaust gas is sucked by the scrubbing liquid.

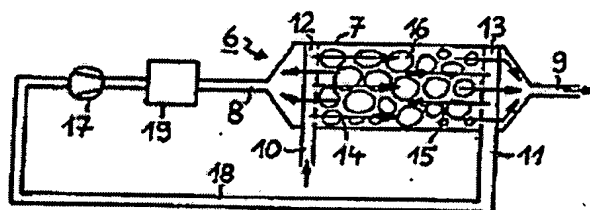

Data supplied from the esp@cenet database - Worldwide